



Yuasa Technisches Datenblatt

Yuasa HJ-S46B24L(S)

Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	45Ah
Kaltstartstrom (A) EN1	325A

Abmessungen

Länge	238mm
Breite	126mm
Höhe	227mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	12.7kg
--	--------



Gehäuseeigenschaften

Gehäusotyp	B24 JIS AGM
Zellenanordnung	1
Batteriehälter	N
Tragegriffe	✓
Semi Traktionseigenschaften	✓
Deckeltyp	VRLA

Technologie

Flammschutz Technologie	✓
Adskiller	Ca/Ca VRLA
Vibration	AGMSORTIMENT
Empfohlener Ladestrom	V1 (30Hz/3g/2hr)
Performance Marking	3A
	W5-C2-V2-E2

Anschlusspol Typ

T1

Standard DIN Post



Positive Terminal

Negative Terminal

Zellenanordnung



Batteriehälter



Datenblatt erstellt am 06/10/2023 - E&EO



Yuasa Technical Data Sheet

Yuasa HJ-S46B24L(S)

Performance

Voltage	12V
Capacity (20-hour)	45Ah
Cold Cranking Amps (EN1)	325A

Dimensions

Length	238mm
Width	126mm
Height	227mm

Weights & Measures

Mean Weight with Acid	12.7kg
-----------------------	--------



Container Features

Case Type	B24 JIS AGM
Cell Layout	1
Hold Down	N
Handles	✓
Semi-Traction Features	✓
Lid Type	VRLA


Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca VRLA AGM
Vibration	V1 (30Hz/3g/2hr)
Recommended Charge Rate	3A
Performance Marking	W5-C2-V2-E2

Terminal Type

T1


Standard DIN Post

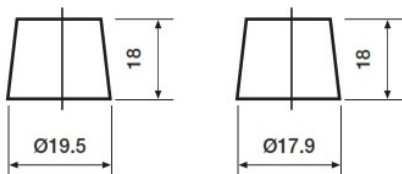

Positive Terminal

Negative Terminal

Cell Assembly Layout

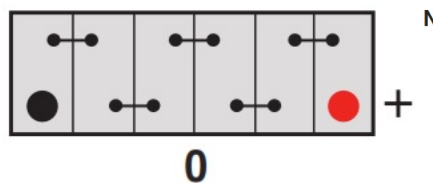

Battery Hold-down



Data Sheet generated on 06/10/2023 – E&OE

