


Data Sheet



Type Number 24223
Designation IEC ---
System Manganese Dioxide /
 Zinc / KOH - Electrolyte
Nominal Voltage 12,0 V
Typical Capacity C 50 mAh
 Load 20 kOhm, at 20°C down to 8.00 V
Weight (approx.) 7,92 g
Volume 2,3 ccm
Coding..... Date of Manufacturing
 Year/Month

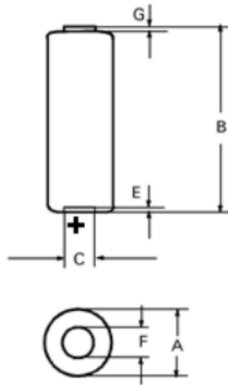

Temperature Ranges

	min	max.
Storage	-10°C	65°C*
Discharge	-10°C	65°C*

Dimensions

	min	max.
Diameter (A)	9,70	10,30
Height (B)	27,5	28,50
Shoulder Diameter (F).....	5,0	5,8
Shoulder Height (G).....	0,3	
Reverse Shoulder Diameter (C).....	5,0	5,8
Reverse Shoulder Height (E).....		0,9

Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage:	8.00 V
Continuous 24h/d,7d/w Current [µA]:	20000Ω	Time:	100 h
		Capacity [mAh]:	50
		Energy [mWh]:	530

* Contact VARTA if the application is intended to be outside the range of -10°C to +65°C.

*Information and contents in this data sheet are for reference purpose only.
 They do not constitute any warranty or representation and are subject to change without notice.
 For most current information and further details, please contact your VARTA representative.*