



Yuasa Technisches Datenblatt

Yuasa HJ-S34B20R

Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	35Ah
Kaltstartstrom (A) EN1	272A

Abmessungen

Länge	197mm
Breite	129mm
Höhe	227mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	10.5kg
--	--------



Gehäuseeigenschaften


Gehäusotyp	B20 JIS AGM
Zellenanordnung	1
Batteriehälter	N
Tragegriffe	✓
Semi Traktionseigenschaften	✓
Deckeltyp	VRLA

Technologie

Flammschutz Technologie	✓
Adskiller	Ca/Ca VRLA
Vibration	AGMSORTIMENT
Empfohlener Ladestrom	V1 (30Hz/3g/2hr)
Performance Marking	2A
	W5-C2-V2-E2


Anschlusspol Typ

T3
Small Japanese
JIS Terminal



Positive Terminal Negative Terminal

Zellenanordnung

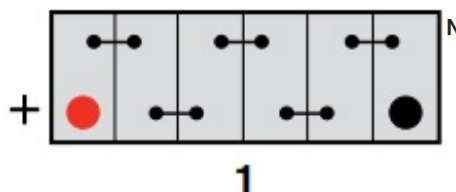

Batteriehälter



Datenblatt erstellt am 06/10/2023 - E&EO



Yuasa Technical Data Sheet

Yuasa HJ-S34B20R

Performance

Voltage	12V
Capacity (20-hour)	35Ah
Cold Cranking Amps (EN1)	272A

Dimensions

Length	197mm
Width	129mm
Height	227mm

Weights & Measures

Mean Weight with Acid	10.5kg
-----------------------	--------



Container Features


Case Type	B20 JIS AGM
Cell Layout	1
Hold Down	N
Handles	✓
Semi-Traction Features	✓
Lid Type	VRLA

Technology


Flame Arrestor Technology	✓
Separator	Ca/Ca VRLA AGM
Vibration	V1 (30Hz/3g/2hr)
Recommended Charge Rate	2A
Performance Marking	W5-C2-V2-E2

Terminal Type

T3
Small Japanese
JIS Terminal



Cell Assembly Layout

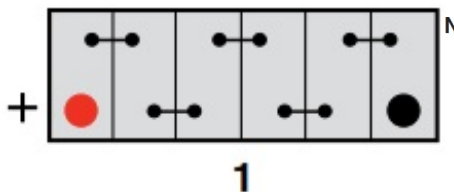

Battery Hold-down



Data Sheet generated on 06/10/2023 – E&OE